




## PORCA SEXTAVADA ASTM A 563

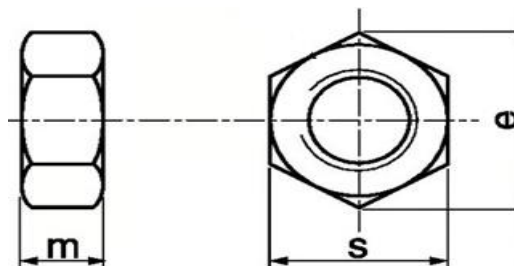

DIÂMETRO NOMINAL	s		e		m	
	máx.	min.	máx.	min.	máx.	min.
1/4"	11,125	10,871	12,827	12,395	5,740	5,384
5/16"	12,700	12,420	14,655	14,147	6,934	6,553
3/8"	14,274	13,995	16,510	15,951	8,559	8,128
7/16"	17,475	17,145	20,167	19,507	9,779	9,271
1/2"	19,050	18,694	21,996	21,336	11,379	10,845
9/16"	22,225	21,869	25,654	24,942	12,598	12,014
5/8"	23,825	23,418	27,508	26,695	14,198	13,589
3/4"	28,575	27,635	32,994	31,496	16,891	15,671
7/8"	33,324	32,232	38,506	36,753	19,710	18,389
1"	38,100	36,830	43,992	41,986	22,529	21,107
1.1/8"	42,875	41,427	49,504	47,218	25,374	23,850
1.1/4"	47,625	46,024	54,991	52,476	27,787	26,162
1.3/8"	52,374	50,647	60,502	57,734	30,632	28,905
1.1/2"	57,150	55,245	65,989	62,992	33,451	31,623